



Easy to use

Support screen control through remote/mobile devices, giving superior interactive experience. Integrated system allows local apps installation, such as wireless screensharing and mobile screen control app.

Easy operation | HMI

Product Parameters			
Product Model	DA1918	DA1920	DA1925
Pixel (mm)	1.8	2.0	2.5
Cabinet Resolution (dots)	171 × 192	160 × 180	128 × 144
Maximum Power Consumption (W/m ²)	295	286	295
Brightness (nits)	500	500	600
Cabinet Size (W × H × D) (mm)	320 × 360 × 39		
Cabinet Weight (kg)	1.16		
Contrast	6500:1		
Viewing Angle (H/V°)	170° /H, 170° /V		
LEDs Life Time	≥100000h		
Maintenance Mode	Front		



H19 PRO Series

The future of oneness has arrived



Whole Cabinet Delivery

Pre-installed all-in-one cabinet, no need for on-site components assembly. Factory original cables and parts with guaranteed quality. 8:9 display ratio, achieve 16:9 standard ratio with ease. Whole cabinet only weighs 1.1kg.


Components pre-installed | Original parts | 8:9 display ratio



Handy Installation

1.1kg lightweight cabinet, which can be installed using magnet, support full-frontal service with air suction tool. 45°corner cut allows 90°splicing. Increase installation efficiency while lower overall operation cost.

Thin & light | Full-frontal service | 90°splicing




 **Right Angle Splice**



Highly Integration

Power supply, receiving card and hub board all integrated into 1 boardm with no extra components, which can reduce connecting wires, increase stability and make maintenance easier.

Easy to service | More reliable | Hot-swapping

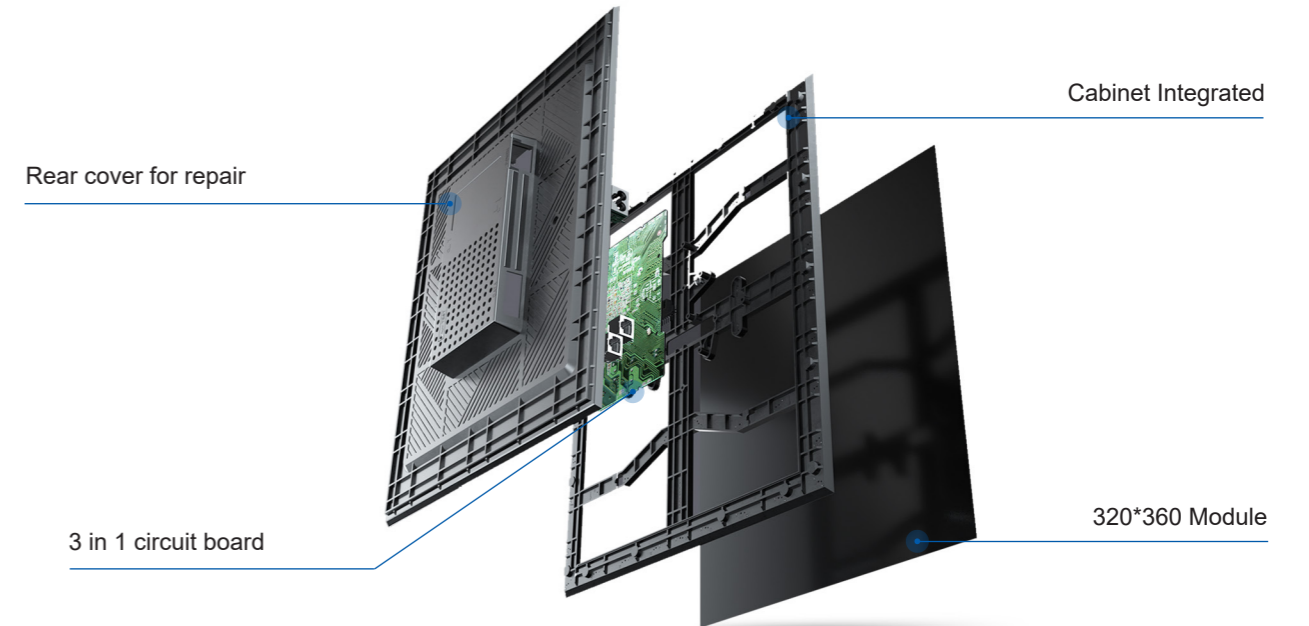

Environmental-friendly

Smart power supply allows Self-adaptive voltage distribution adjustment, and support constant dynamic output. Voltage will be stabilized at saturation point, which better reduce power-consumption. The cabinets are also RoHS compliant.

V-0 Flame retardant | RoHS compliant

▪ H19 PRO 500cd/m²
maximum power consumption

295w/m²

▪ Common cathode products 500cd/m²
maximum power consumption

440w/m²

